



1900 Wellworth Ave. • Jackson, MI 49203
517-787-2100

Submittal Data

MODEL
PTAC12G130A-CY

Project Name:	
Location:	
Engineer:	
Submitted to:	
Submitted by:	

Approval:	
Date:	
Construction:	
Unit #:	
Drawing #:	

Reference:

PERFORMANCE DATA

Power supply		208/230V/60
Cooling		
Capacity	Btu/h	11800/12000
Input	W	1090/1110
Rated current	A	5.0/5.5
EER	Btu/w	10.8/10.8

Heating		
Capacity	Btu/h	NA
Rated Input (elect. Heater)	Kw	2500/3050
Rated current	A	12/13.2
Max. Current	A	NA

Compressor Electrical		
Model		44X2623KTFJMZ
Type		ROTARY
Brand		RECHI
Capacitor	mF	30
Refrigerant type	oz	R32/21.5

Air flow & Noise level		
Indoor air flow	CFM	412/471
Indoor noise level	dB(A)	46/52
Outdoor noise level	dB(A)	66

Indoor Fan Motor		
Model		YDK-30-4
Input	W	70
Capacitor	uF	1.8
Speed(Hi/Lo)	rpm	850/1100

Accessories	
Wall Sleeve-breakdown	7602-500F
Stamped Aluminum Grill	7602-501F
Architectural Aluminum Grill	7602-505F
Colored Polymer Grills	See Catalog
Indoor Discharge Air Deflector	7602-508F
Wireless Wall Thermostat	7602-536A




Outdoor Coil	Seacoast Coating
Outdoor Fan Motor	
Model	YDK-AI-55-4P2
Input	W 104
Speed	RPM 1600

Dimensional Data		
Dimension(W*H*D)	inch	41.97x21.1x161
Packing (W*H*D)	inch	45.3*24.8*18.9
Net/Gross weight	lbs.	105.82/116.85

System Data	
Design pressure	232/493 PSIG
	Remote Controller
Thermostat type	On-Board
	Wired Thermostat

Cord and Plug		
Cord Length	ft.	6.5
Plug Face	Nema	6-20P

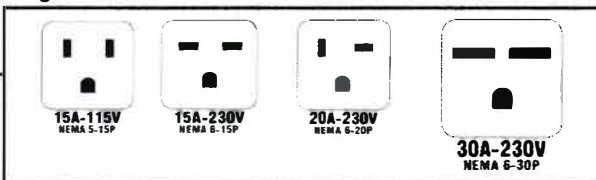

Subbase (no receptical)	7602-509F
Drain Kit	7602-506F
Duct Kit	7602-511F
Universal Remote	7602-512
Thermostat Locking Cover	7602-535